
## SIMPLER SMARTER THANEVER









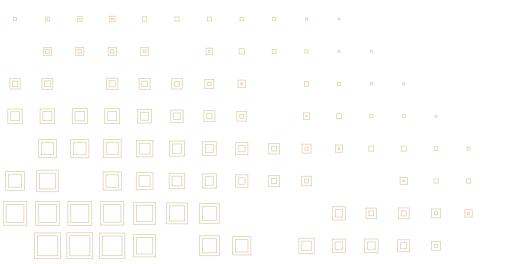



## Classia

- **SIMPLE** SHAPE
- **SIMPLE** CHOICE
- **SMART** SOLUTION
- **SMART** INSTALLATION
- 14 CATALOGUE




# SIMPLE SHAPE



2


A modern pure shape, defined by an accurate outline which contrasts with a gently curved surface. The frame gives a unique touch to your switch.

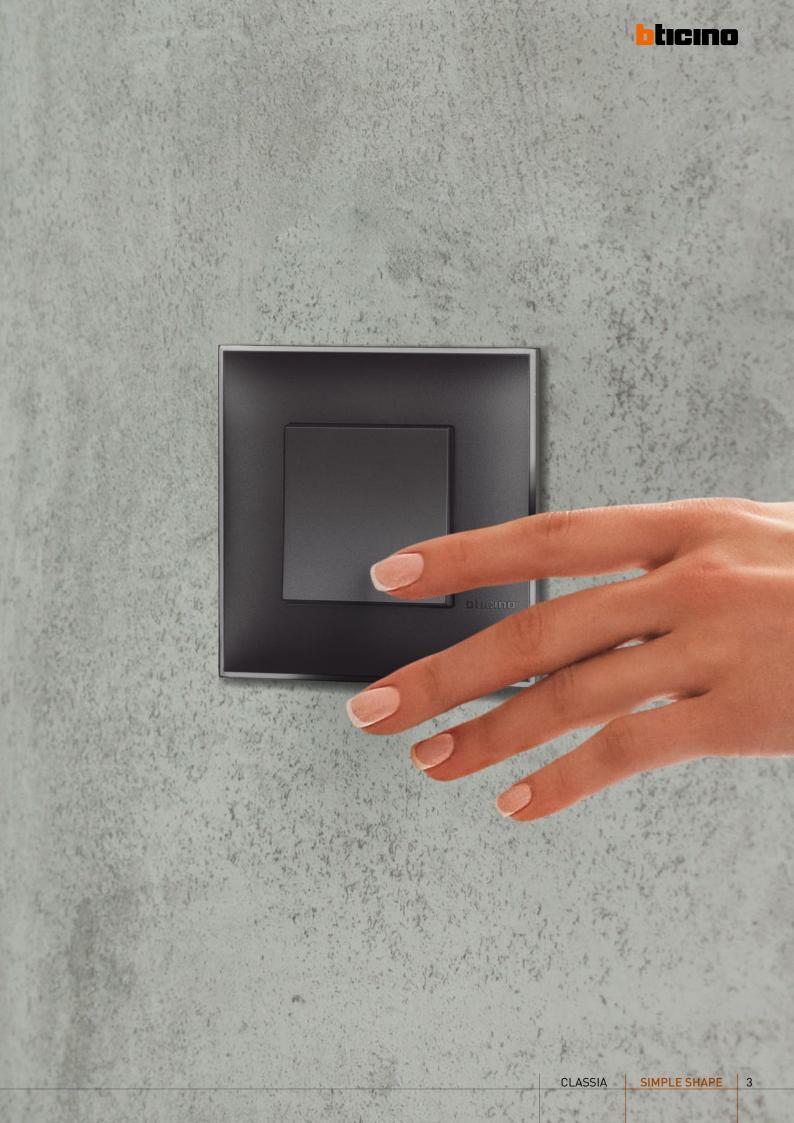

Two finishes of shiny white and black satin devices

Frame from tone to tone effects to metal gold, chrome, nickel



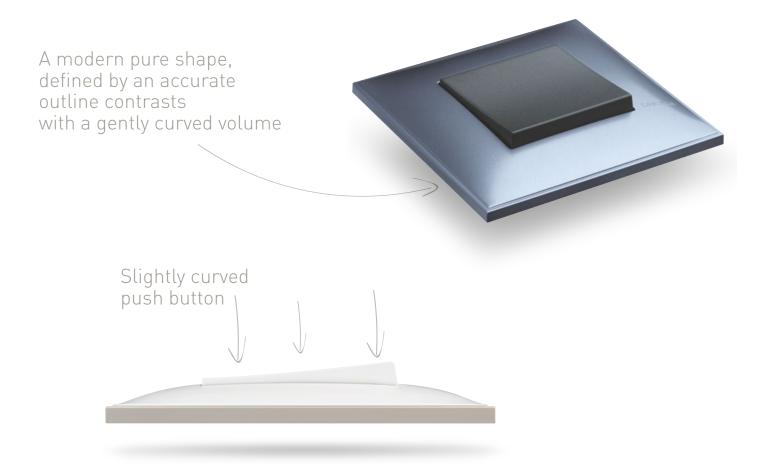


#### **SWITCH: 2 DIFFERENT VERSION**

Not lightable: always uniform aesthetic Lightible with led included: advantage to have a clear, intense bright beam



16 plate finishes to match with 2 different colors of controls: white glossy - black satin. The richness grows with the richness of frame from tone to tone effects to metal gold, chrome, nickel.

# S A PLE CHOICE

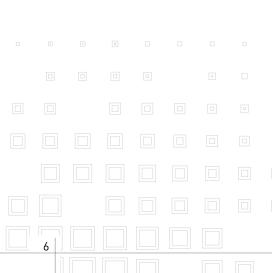



## BASICS

White





Black



FRAMES



Ice satin

White satin




Cream satin



Black satin



FINISHES

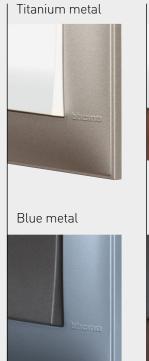



ACCENTS



Black nickel





Black gold



CLASSIA SIMPLE CHOICE

7




A unique and complete offer with all the modular systems: Italian and European standard.





### ALL POSSIBLE

6 For European installation system - up to 5 gangs

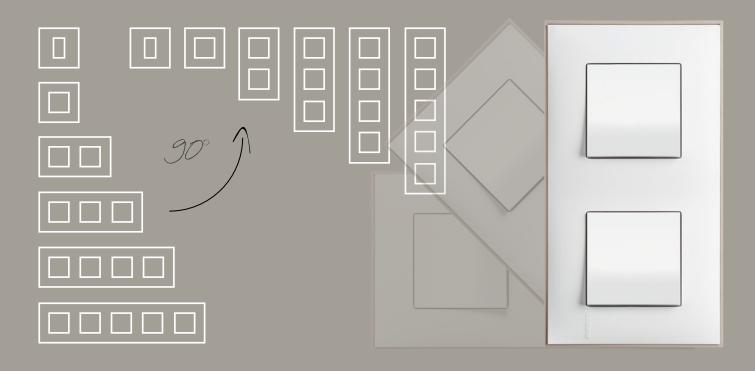





High performance and quality that gives a perfect installation in any kind of box and wall. Cover plates designed to mach both Italian and European standard.

# SNAR RUS INSTALLATION






#### **INSTALLATION SYSTEM**

- Innovative cover plates regolation system guarantee plate flush on the wall
- Easy installation and removal of devices


#### Screw fixing support

PLASTERBOARD INSTALLATION: - Frame to be removed on plasterboard wall to guarantee the perfect alignment of cover plates and switches flush on the wall.

> METAL INSERT: - It makes the support rigid. - The metal eyelets guarantee a better fixing of the screws.

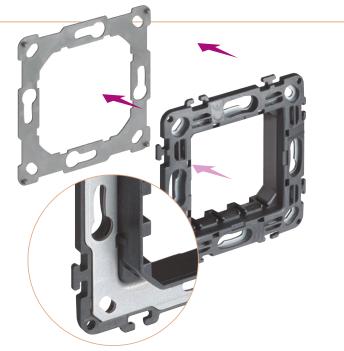



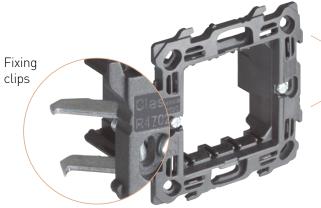

#### Innovative docking system for multiple installations.

If needs you can remove the clips and install the support with the screw.

Perfect alignment due to a self-supporting hooking system. High resistance due to special material



#### CLASSIA Switches

RW4001	RG4001	RW4001L	RG4001L
RW4001M2	RG4001M2	• RW4001M2L	RG4001M2L
© RW4001LS	© RG4001LS	RW4001LP	© RG4001LP
RW4001LR	RG4001LR	© RW4001LA	© RG4001LA
RW4002L	C I RG4002L		
		•	

ltem	ONE-WAY SWITCHES
□ RW4001	1P 10 AX - 250 Va.c 1 module - white
■ RG4001	as above - black
□ RW4001L	1P 10 AX - 250 Va.c lightable with led lamp 230 V included - 1 module - white
■ RG4001L	as above - black
□ RW4001M2	1P 10 AX - 250 Va.c 2 modules - white
■ RG4001M2	as above - black
□ RW4001M2L	1P 10 AX - 250 Va.c lightable with led lamp 230 V included - 2 modules - white
■ RG4001M2L	as above - black
□ RW4001LS	1P 16 AX - 250 Va.c lightable with led lamp 230 V included - 1 module - boiler symbol - white
■ RG4001LS	as above - black
CRW4001LP	1P 16 AX - 250 Va.c lightable with led lamp 230 V included - 1 module - heater symbol - white
RG4001LP	as above - black
□ RW4001LR	1P 10 AX - 250 Va.c lightable with led lamp 230 V included - 1 module - fan symbol - white
■ RG4001LR	as above - black
□ RW4001LA	1P 10 AX - 250 Va.c lightable with led lamp 230 V included - 1 module - lamp symbol - white
■ RG4001LA	as above - black
□ RW4002L	2P 16 AX - 250 Va.c lightable with led lamp 230 V included - 1 module - white
■ RG4002L	as above - black

	TWO-WAY SWITCHES
□ RW4003	1P 10 AX - 250 Va.c 1 module - white
■ RG4003	as above - black
□ RW4003L	1P 10 AX - 250 Va.c lightable with led lamp 230 V included - 1 module - white
RG4003L	as above - black
□ RW4003M2	1P 10 AX - 250 Va.c 2 modules - white
■ RG4003M2	as above - black
□ RW4003M2L	1P 10 AX - 250 Va.c lightable with led lamp 230 V included - 2 modules - white
■ RG4003M2L	as above - black

#### **FOUR-WAY SWITCHES**

intermediate switch 10 AX - 250 Va.c 1 module - white	
as above - black	
intermediate switch 10 AX - 250 Va.c lightable with led lamp 230 V included - 1 module - white	
as above - black	
intermediate switch 10 AX - 250 Va.c 2 modules - white	
as above - black	
L intermediate switch 10 AX - 250 Va.c lightable with I lamp 230 V included - 2 modules - white	
as above - black	

RW4003



RG4003

RW4003M2







0

RW4003L



RG4003L



RW4004M2







RG4004L

RG4004M2

RW4004M2L

RG4004M2L

12



#### CLASSIA Switches

				Item	POSHROLIONS
	_		_	□ RW4005	1P (NO) 10 A - 2
				■ RG4005	1P (NO) 10 A - 2
				□ RW4005L	1P (NO) 10 A -
		•			included - 1 mo
				RG4005L	as above - blac
RW4005	RG4005	RW4005L	RG4005L	□ RW4005M2	1P (NO) 10 A - 2
				■ RG4005M2	as above - blac
				□ RW4005M2L	1P (NO) 10 A -
					included - 2 mo
		•		■ RG4005M2L	as above - blac
	and the second second second			□ RW4042V230	1P (NO) 10 A - 2
RW4005M2	RG4005M2	RW4005M2L	RG4005M2L		230 V included
	_	_	_	■ RG4042V230	as above - blac
				□ RW4042V12	1P (NO) 10 A - 2
					12/24 V include
2	(3)	<b>(2)</b>		■ RG4042V12	as above - blac
				□ RW4043	pushbutton 1P
RW4042V230	RG4042V230	RW4042V12	RG4042V12		with led lamp 2
				■ RG4043	as above - blac
				OR4040	pushbutton 1P
0	0				
RW4043	RG4043	R4040			
					OTHER SWITCH
				□ RW4001B3	bathroom swit
					circuits 10/2x10
				□ RW4001B4	bathroom swi
					circuits 2x10/2
0		0			
				J	
RW4001B3		RW4001B4			
					PASSIVE INFRA
				□ RW4431	switch with pa
					types of load in
1.1855	A.3.4				with variable
ea	amel				- timing circuit
<u> </u>	* O				seconds to 10 r
RW4431	RG4431				- white
				■ RG4431	as above - blac
				DW/4027	SHUTTER SWIT
				□ RW4037	double 1P (NO)
=	<b>a</b>	-	9		1 module - whi
				RG4037	as above - blac
=	=	=	=	□ RW4027	changeover sw
				■ RG4027	as above - blac

ltem	PUSHBUTTONS
□ RW4005	1P (NO) 10 A - 250 Va.c 1 module - white
■ RG4005	1P (NO) 10 A - 250 Va.c 1 module - black
🗆 RW4005L	1P (NO) 10 A $-$ 250 Va.c lightable with led lamp 230 V
	included - 1 module - white
RG4005L	as above - black
C RW4005M2	1P (NO) 10 A - 250 Va.c 2 modules - white
■ RG4005M2	as above - black
□ RW4005M2L	1P (NO) 10 A $-$ 250 Va.c lightable with led lamp 230 V
	included - 2 modules - white
■ RG4005M2L	as above - black
□ RW4042V230	1P (NO) 10 A - 250 Va.c bell symbol - lightable with led lamp
	230 V included - 1 module - white
■ RG4042V230	as above - black
□ RW4042V12	1P (NO) 10 A - 250 Va.c bell symbol - lightable with led lamp
	12/24 V included - 1 module - white
■ RG4042V12	as above - black
🗆 RW4043	pushbutton 1P (NO) 10A - 250Va.c. lamp symbol - lightable
	with led lamp 230 V included - white
■ RG4043	as above - black
○ <b>R4040</b>	pushbutton 1P (NO) 10A with nameplate - 2 modules

	OTHER SWITCHES
□ RW4001B3	bathroom switch with indication for three independent circuits 10/2x16 AX 250 Va.c. (light, heater, boiler)
□ RW4001B4	bathroom switch with indication for four independent circuits 2x10/2x16 AX 250 Va.c. (light, fan, heater, boiler)

	PASSIVE INFRARED SWITCHES
□ RW4431	switch with passive infrared motion sensor suitable for all types of load including LED lamps - 3 wires - twilight circuit with variable threshold with the possibility of exclusion - timing circuit for delayed switch-off adjustable from 30 seconds to 10 minutes - 230 V power supply .c 1 module - white
■ RG4431	as above - black

	SHUTTER SWITCHES
□ RW4037	double 1P (NO) + 1P (NO) 10A - 250Va.c. interlocked -
	1 module - white
RG4037	as above - black
🗆 RW4027	changeover switch 1P 10 A - 250 Va.c 1 module - white
■ RG4027	as above - black

RW4027

RG4027

RG4037

RW4037

#### CLASSIA **Dimmers**





RW4402

RG4402

RG4411





DIMMER □ RW4402 rotary dimmer 40 - 400 W 230 Va.c. - 1 module - white ■ RG4402 as above - black universal dimmer (resistive – inductive, capacitive, fluorescent compact and dimmer LEDs) - 150/200/400 W □ RW4411 with electronic protection - 2 modules - white ■ RG4411 as above - black

RW4411

Loads								
							Ļ	
ltem	Туре	Range (Va.c.)	Supply std	Incandescents and hologens	Halogens with ferromagnetic transformer	Halogens with electronic transformer	Dimmerable compact fluorescents	Dimmerable LED lamps
RW4402 RG4402	Resistive	230 50	230 Va.c.	40 ÷ 400 W				
RW4411	Universal	100 ÷ 240 50 ÷ 60	230 Va.c. 100 Va.c.	3 ÷ 200 W 3 ÷ 400 W	3 ÷ 200 VA 3 ÷ 400 VA	3 ÷ 200 VA 3 ÷ 400 VA	3 ÷ 75 W 3 ÷ 150 W	3 ÷ 75 W 3 ÷ 150 W

#### Socket outlets



RW4141

R4141A







R4141V



R4141R

RW4141C

RG4141C

ltem	GERMAN STANDARD		
□ RW4141	socket 2P+E 16A 250 Va.c socket with earth side contacts - shielded tulip contacts - white		
■ RG4141	as above - black		
OR4141A	as above - orange		
OR4141R	as above - red		
OR4141V	as above - green		
□ RW4141C	socket 2P+E 16A 250 Va.c socket with earth side contacts - shielded tulip contacts, with IP20 flap - white		
■ RG4141C	as above - black		



**ITALIAN STANDARD** 

2P+E 16 A 250 Va.c. socket - center distance 19 mm and 26

□ RW4180

#### CLASSIA Socket outlets

	1	8		mm - shielded tulip contacts - for plugs 2 P and 2 P+E 10 and 16 A Italian standard - white
	B	8	■ RG4180	as above - black
			<b>OR4180R</b>	as above - red
RW4180	RG4180	R4180R	□ RW4113	socket 2P+E 10A 250 Va.ctype earth side contacts - shielded socket contacts - white
•	0		■ RG4113	as above - black
• RW4113	RG4113		□ RW4140A16	socket 2P+E 10A and 16A 250 Va.c. 19 mm and 26 mm center distance, 2-center socket configuration protected socket contacts; earth side contacts for German standard plugs; suitable for Italian standard plugs 2P and 2P+E 10/16A, German standard plugs 2P+E 16A - white
F			■ RG4140A16	as above - black
			○ <b>R4140A16</b> R	as above - red
			□ RW4125 ■ RG4125	socket 2P 16 A 127/250 Va.c shielded holes - white as above - black
RW4125	RG4125			ISRAELI STANDARD
			□ RW4183	socket 2P+E 16 A 250 Va.c white
-	-	-	■ RG4183	as above - black
•••)	•••)	•••	○ <b>R4183R</b>	as above - red
RW4183	RG4183	R4183R		
105	105	N4105N		USB CHARGER
			□ RW4287C2	5 Vdc USB charger TYPE A and C for quick charge of one single electronic device (mobile phones, smartphones,tablets or similar) up to 3000 mA or simultaneouscharging of two devices up to 1500 mA- 110÷230 Va.c. 50÷60 Hz power supply - 2 modules - white
RW4287C2	RG4287C2		■ RG4287C2	as above - black
			□ RW4286C2	5 Vdc USB charger TYPE C for quick charge of one single electronic device (mobile phones, smartphones,tablets or similar) up to 3000 mA or simultaneouscharging of two

RW4286C2



RG4286C2

devices up to 1500 mA- 110÷230 Va.c. 50÷60 Hz power

supply - 2 modules- white

as above - black

■ RG4286C2

#### CLASSIA TV sockets

			TV SOCKETS
•		□ RW4202D	star coaxial socket for single-user aerial systems, also remote powered and centralised, and single-user / centralised satellite systems with current and signal transfer for channels selection; shielded connection clamps with captive screws - Ø 9.5 mm; male connector - 1 module - white
RW4202D	RG4202D	■ RG4202D	as above - black
RW4202P10		□ RW4202P10	terminal coaxial socket, -10dB attenuation, for centralised TV systems, also remote powered, and centralised satellite systems with current and signal transfer for channels selection; shielded connection clamps with captive screws – $\emptyset$ 9,5 mm – male connector – incorporated impedance final adapter 75 $\Omega$ – 1 module – white
RW4202P10	RG4202P10	RG4202P10	as above - black
		□ RW4202P14	passthrough coaxial socket, -14dB attenuation, for centralised TV systems, also remote powered, and centralised satellite systems with current and signal transfer for channels selection - shielded connection clamps with captive screws - Ø 9.5 mm; male connector - 1 module - white
RW4202P14	RG4202P14	■ RG4202P14	as above - black
00		□ RW4217M2D	star demixed coaxial socket for single-user aerial systems, also remote powered and shunting centralized, and for single-user / shunting centralized satellite systems with current and signal transfer for channels selection; Ø 9.5 mm; male connector - type F SAT connector - 2 modules - white
RW4217M2D	RG4217M2D	■ RG4217M2D	as above - black
RW4217M2P10	© © SAT TV SAT RG4217M2P10	□ RW4217M2P10	terminal demixed coaxial socket, -10dB attenuation, for centralized TV systems, also remote powered, and centralized satellite systems with current and signal transfer for channels selection; Ø 9.5 mm; male connector - type F SAT connector - incorporated impedance final adapter 75 $\Omega$ - 2 modules - white
		■ RG4217M2P10	as above - black
RW4217M2P14	© © SAT RG4217M2P14		passthrough demixed coaxial socket, -14dB attenuation, for centralized TV systems, also remote powered, and centralized satellite systems with current and signal transfer for channels selection; Ø 9.5 mm; male connector - type F SAT connector - 2 modules - white
		■ RG4217M2P14	as above - black
RW4210M2D	RG4210M2D	□ RW4210M2D	star demixed coaxial socket for single-user aerial systems, also remote powered and shunting centralised, and for single-user/shunting centralised satellite systems with current and signal transfer for channels selection, and for radio systems; Ø 9.5 mm male TV connector - type F SAT connector and female radio Ø 9.5 mm - 2 modules - white
		■ RG4210M2D	as above - black
0	•	□ RW4202F	type-F coaxial socket - impedance 75 ohm - screw hook - 1 module - white
		■ RG4202F	as above - black
RW4202F	RG4202F		

**TV SOCKETS** 



#### CLASSIA Telephone and data sockets



RG4258RJ11

RG4279C5E





RW4238

RW4279C6



LABORT

RG4238

RW4279C5E





RW4279C6S

RG4279C6S

RW4279C6AS

RG4279C6AS


RG4279C6

ltem	RJ CONNECTORS
□ RW4258RJ11	RJ11 connector type K10 - 1 module - white
■ RG4258RJ11	as above - black
□ RW4238	telephone socket - ISRAELI standard - 1 module - white
■ RG4238	as above - black
□ RW4279C5E	RJ45 toolless UTP cat5E - 1 module - white
■ RG4279C5E	as above - black
□ RW4279C6	RJ45 toolless UTP cat6 - 1 module - white
■ RG4279C6	as above - black
□ RW4279C6S	RJ45 toolless STP cat6 - 1 module - white
RG4279C6S	as above - black
□ RW4279C6AS	RJ45 toolless STP cat6A - 1 module - white
■ RG4279C6AS	as above - black

#### Optical and acoustic signallings




ltem	BELLS AND BUZZERS
C RW4351V230	bronze bell 230 Va.c. 8 VA - 1 module - white
■ RG4351V230	as above - black
🗆 RW4356V230	buzzer 230 Va.c. 8 VA - 1 module - white
■ RG4356V230	as above - black

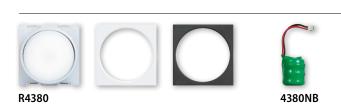

REMOVABLE LED L	nimi -
Pull extracting syst switch and SPOT bu - interchangeable consuption in star	rns on in the case of power failure. Push & tem - high efficiency white LED - ON / OFF utton to increase light intensity if needed Ni-MH batteries with 2h duration - low nd-by 0,4W - 127 / 230V power supply. modules - cover included.
O4380NB spare battery for re	emovable led lamp R4380

#### Blanking modules

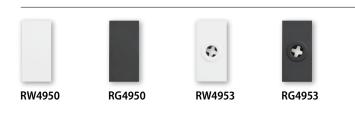

ltem	BLANKING MODULES AND OUTPUTS
□ RW4950	blank plate - 1 module - white
■ RG4950	as above - black
🗆 RW4953	simple output ø 9.5 mm - 1 module - white
■ RG4953	as above - black

#### CLASSIA Hotel offer

		ltem	PULL-CORD PUSHBUTTON
		□ RW4033	1 P (NO) 10 A - 250 Va.c. with cord-pull - 1 module - white
RW4033	RG4033	■ RG4033	as above -black
			MAKE UP THE ROOM / DO NO DISTURB
\$	2	□ RW4028H	1P 10 A – 250 Vac double-key changeover switch 1-0-2 with interlock and double signalling: "do not disturb" and "make up the room". 1 module - white
	4	■ RG4028H	as above - black
RW4028H	RG4028H	□ RW4373H	lampholder with double optical signalling: "do not disturb" and "rearrange the room" - 1 module - white
	_	■ RG4373H	as above - black
A   M   RW4373H	☆   ♪   RG4373H		
			MULTISTANDARD SOCKETS
•	Ş	□ RW4139	socket 2P+E 5/6/10/13 A 250 Va.c. and 127 Va.c. multistandard - 5 A and 13 A = BS std; 6 A = Indian std., 10 A = European std white
- HE (100		■ RG4139	as above - black
RW4139	RG4139		SHAVER SOCKETS
		□ RW4177	shaver socket 230V - white
RW4177	RG4177	■ RG4177	as above - black
			KEY FOB SWITCH
		□ RW4549	key fob switch to switch ON lights and devices in hotel rooms - slot light with built-in lamp - switch-off delay - max. load 30 VA 230 Vac - 2 modules - white
		■ RG4549	as above - black
RW4549	RG4549		
			ROOM TEMPERATURE CONTROL
		□ RW4441	electronic room thermostat – relay output with 1 contact in switch ing 2 A 250 Va.c 230 Va.c. power supply – 50 and 60 Hz - 2 module - white
		■ RG4441	as above - black
RW4441	RG4441		

NOTE: D White colour device Black colour device O Neutral item



#### COVER PLATES COLOURS

BASICS	White - <b>RW</b>	Cream - CR	Moka - <b>MK</b>	Black - <b>BC</b>
FRAMES	Ice satin - <b>ES</b>	Cream satin - <b>CS</b>	White satin - <b>WS</b>	Black satin - <b>BG</b>
FINISHES	Titanium metal - <b>TM</b>	Siena soft - <b>SF</b>	Blue metal - <b>LM</b>	Terra soft - <b>TF</b>
ACCENTS	White gold - WD	White chrome - WR	Black nickel - <b>BH</b>	Black gold - <b>BD</b>

#### COVER PLATES: TABLE FOR SELECTING CODE Area Europa installation system

SUPPORTS					
1 centered	2 "	2+2 horizontal/vertical instal."	2+2+2 "horizontal/vertical instal."	2+2+2+2 "horizontal/vertical instal."	2+2+2+2+2 "horizontal/vertical instal."
R4801RW	R4802RW	R4802M2RW	R4802M3RW	R4802M4RW	R4802M5RW
R4801CR	R4802CR	R4802M2CR	R4802M3CR	R4802M4CR	R4802M5CR
R4801MK	R4802MK	R4802M2MK	R4802M3MK	R4802M4MK	R4802M5MK
R4801BC	R4802BC	R4802M2BC	R4802M3BC	R4802M4BC	R4802M5BC
R4801ES	R4802ES	R4802M2ES	R4802M3ES	R4802M4ES	R4802M5ES
R4801CS	R4802CS	R4802M2CS	R4802M3CS	R4802M4CS	R4802M5CS
R4801WS	R4802WS	R4802M2WS	R4802M3WS	R4802M4WS	R4802M5WS
R4801BG	R4802BG	R4802M2BG	R4802M3BG	R4802M4BG	R4802M5BG
R4801TM	R4802TM	R4802M2TM	R4802M3TM	R4802M4TM	R4802M5TM
R4801SF	R4802SF	R4802M2SF	R4802M3SF	R4802M4SF	R4802M5SF
R4801LM	R4802LM	R4802M2LM	R4802M3LM	R4802M4LM	R4802M5LM
R4801TF	R4802TF	R4802M2TF	R4802M3TF	R4802M4TF	R4802M5TF
R4801WD	R4802WD	R4802M2WD	R4802M3WD	R4802M4WD	R4802M5WD
R4801WR	R4802WR	R4802M2WR	R4802M3WR	R4802M4WR	R4802M5WR
R4801BH	R4802BH	R4802M2BH	R4802M3BH	R4802M4BH	R4802M5BH
R4801BD	R4802BD	R4802M2BD	R4802M3BD	R4802M4BD	R4802M5BD
FRAME					
P/702G with cline	<b>R4702G</b> with clins	2 v <b>B4702G</b> with clip	s 3 x <b>B4702G</b> with clip	s 4 x <b>B4702G</b> with clip	5 x <b>R4702G</b> with clips
	1 centered R4801RW R4801CR R4801MK R4801BC R4801BC R4801ES R4801CS R4801WS R4801WS R4801BG R4801F R4801SF R4801LM R4801F R4801F R4801BH R4801BH R4801BH R4801BH	1         2           rentered         "           R4801RW         R4802RW           R4801RW         R4802RW           R4801CR         R4802CR           R4801MK         R4802MK           R4801BC         R4802BC           R4801ES         R4802ES           R4801CS         R4802CS           R4801WS         R4802WS           R4801BG         R4802BG           I         R4801F           R4801BG         R4802SF           R4801SF         R4802SF           R4801F         R4802LM           R4801F         R4802LM           R4801BH         R4802WD           R4801BH         R4802WR           R4801BH         R4802BH           R4801BD         R4802BD           FRAME         FRAME	1 centered22+2 "horizontal/vertical instal."R4801RWR4802RWR4802M2RWR4801RWR4802CRR4802M2CRR4801CRR4802MKR4802M2CRR4801BCR4802BCR4802M2BCR4801ESR4802ESR4802M2ESR4801CSR4802CSR4802M2CSR4801WSR4802BGR4802M2WSR4801BGR4802BGR4802M2WSR4801BGR4802BGR4802M2ESR4801BGR4802FR4802M2WSR4801FFR4802FR4802M2ESR4801FFR4802FR4802M2ESR4801FFR4802FR4802M2ESR4801FFR4802FR4802M2ESR4801WDR4802WRR4802M2WDR4801WRR4802WRR4802M2WDR4801BHR4802BHR4802M2BHR4801BDR4802BDR4802M2BDFRAMEFRAME	1 centered22+2 "horizontal/vertical instal."2+2+2 "horizontal/vertical instal."R4801RWR4802RWR4802M2RWR4802M3RWR4801RWR4802RCR4802M2CRR4802M3RWR4801RKR4802CRR4802M2CRR4802M3CRR4801MKR4802MKR4802M2CRR4802M3MKR4801BCR4802BCR4802M2BCR4802M3BC </td <td>1         2         2+2         2+2+2         2+2+2         2+2+2+2         2+2+2+2           rentered         "horizontal/vertical instal."         "horizontal/vertical instal."         "horizontal/vertical instal."         "horizontal/vertical instal."           R4801RW         R4802RW         R4802M2RW         R4802M3RW         R4802M4RW           R4801CR         R4802CR         R4802M2CR         R4802M3CR         R4802M4CR           R4801KK         R4802MK         R4802M3KK         R4802M3KK         R4802M4KR           R4801BC         R4802BC         R4802M2ES         R4802M3ES         R4802M4EC           R4801ES         R4802ES         R4802M2ES         R4802M3ES         R4802M4ES           R4801ES         R4802CS         R4802M2CS         R4802M3ES         R4802M4ES           R4801ES         R4802ES         R4802M2ES         R4802M3ES         R4802M4ES           R4801WS         R4802EG         R4802M2ES         R4802M3ES         R4802M4WS</td>	1         2         2+2         2+2+2         2+2+2         2+2+2+2         2+2+2+2           rentered         "horizontal/vertical instal."         "horizontal/vertical instal."         "horizontal/vertical instal."         "horizontal/vertical instal."           R4801RW         R4802RW         R4802M2RW         R4802M3RW         R4802M4RW           R4801CR         R4802CR         R4802M2CR         R4802M3CR         R4802M4CR           R4801KK         R4802MK         R4802M3KK         R4802M3KK         R4802M4KR           R4801BC         R4802BC         R4802M2ES         R4802M3ES         R4802M4EC           R4801ES         R4802ES         R4802M2ES         R4802M3ES         R4802M4ES           R4801ES         R4802CS         R4802M2CS         R4802M3ES         R4802M4ES           R4801ES         R4802ES         R4802M2ES         R4802M3ES         R4802M4ES           R4801WS         R4802EG         R4802M2ES         R4802M3ES         R4802M4WS


#### Area Italian installation system

	SUPI	PORTS				
	1 centered	2 centered	3	4	7	
BASICS						
White	R4803M1RW	R4819RW	R4803RW	R4804RW	R4807RW	
Cream	R4803M1CR	R4819CR	R4803CR	R4804CR	R4807CR	
Moka	R4803M1MK	R4819MK	R4803MK	R4804MK	R4807MK	
Black	R4803M1BC	R4819BC	R4803BC	R4804BC	R4807BC	
FRAMES						
Ice satin	R4803M1ES	R4819ES	R4803ES	R4804ES	R4807ES	
Cream satin	R4803M1CS	R4819CS	R4803CS	R4804CS	R4807CS	
White satin	R4803M1WS	R4819WS	R4803WS	R4804WS	R4807WS	
Black satin	R4803M1BG	R4819BG	R4803BG	R4804BG	R4807BG	
FINISHES						
Titanium metal	R4803M1TM	R4819TM	R4803TM	R4804TM	R4807TM	
Siena soft	R4803M1SF	R4819SF	R4803SF	R4804SF	R4807SF	
Blue metal	R4803M1LM	R4819LM	R4803LM	R4804LM	R4807LM	
Terra soft	R4803M1TF	R4819TF	R4803TF	R4804TF	R4807TF	
ACCENTS						
White gold	R4803M1WD	R4819WD	R4803WD	R4804WD	R4807WD	
White chrome	R4803M1WR	R4819WR	R4803WR	R4804WR	R4807WR	
Black nickel	R4803M1BH	R4819BH	R4803BH	R4804BH	R4807BH	
Black gold	R4803M1BD	R4819BD	R4803BD	R4804BD	R4807BD	
	FRAME					
	R4703	R4703	R4703	R4704	R4707	



#### CLASSIA Area Europa installation system (71 mm center distance)

#### SELECTION TABLE

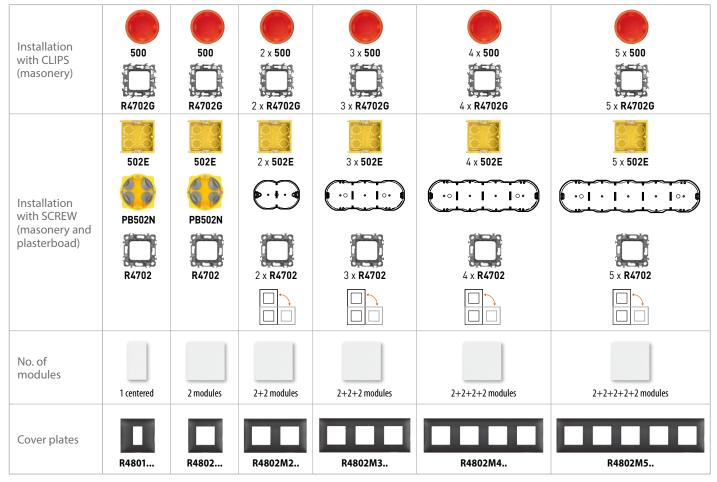

#### Area Italian installation system

#### SELECTION TABLE

Masonery	503E	503E	503E	504E	506L
Plasterboard boxes	PB503N	PB503N	PB503N	PB504N	PB506N
Frames	R4703	R4703	R4703	R4704	R4707
No. of modules	1 centered	2 centered	3	4	7
Cover plates	R4803M1	R4819	R4803	R4804	R4807


The frame can be installed on all the market boxes.

CLASSIA	CATALOGUE	21

#### CLASSIA IP55 waterproof covers

## DESCRIPTION DESCRIPTION DESCRIPTION 2 modules 3 modules 4 modules 4 modules 2 modules 2 modules 2 modules 2 modules 2 modules

#### IP40 wall-mounting enclosures

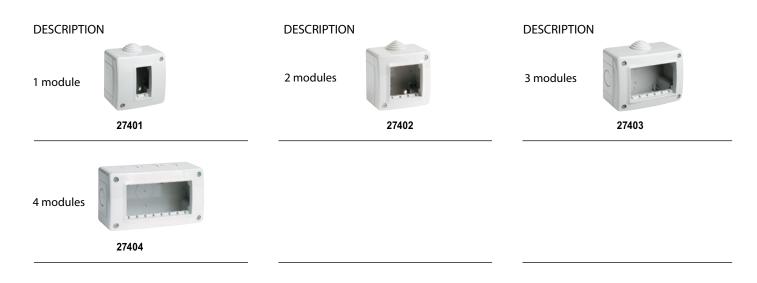

#### IP55 wall-mounting enclosures

DESCRIPTION	DESCRIPTION	DESCRIPTION
1 module	2 modules	3 modules
27501	27502	27503
4 modules 27504		





#### CLASSIA **Dimensional data**


COVER PLATES


#### Area Europa installation system


ŧ








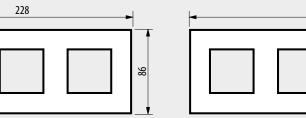

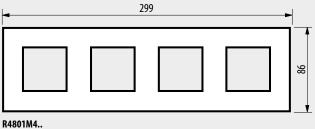


R4801M3..

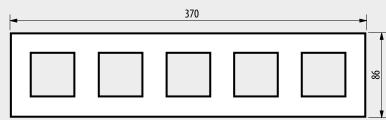


R4801M5..

#### Area Italian installation system





R4803M1..






R4804..





R4807..



#### CLASSIA Packaging

It has been designed for both retail and DIY exposure: each product has a single packaged



- Euroslot
- Security information inside on 11 languages
- Ean code
- Info for packaging recycling
- QR code for technical information

Discover more



bticino.com

**BTicino** SpA Viale Borri, 231 21100 Varese - Italy www.bticino.com

